THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED. REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS REV. **DESCRIPTIONS** DATE **APPROVED** CLASS A RELEASED 7/12/99 NOTE 3: ADDED IEC 61010-031 1,000 V CAT IV & RoHS; REVISED PLUG CONFIGURATION, PAGE 2. 2/7/05

1. 4mm BANANA PLUG LEAD, SHEATHED PLUG TO SHEATHED PLUG, 0.75mm2, SILICONE JACKETED WIRE. CE MARK AND CSA LISTED (US AND CANADA).

2. SPECIFICATIONS:

WIRE:

REINFORCED SILICONE (-60° C TO +180° C) 195x0.07mm STRANDED BARE COPPER, 0.75mm2 CROSS SECTION, 18 AWG, $\emptyset.146\pm.008$ ($\emptyset3.7\pm0.2$ mm) O.D.

INSULATED HOUSING:

POLYPROPYLENE THERMOPLASTIC, UL94V-0.

CONTACT:

4mm, 9 LEAF, BERYLLIUM COPPER, NICKEL PLATED.

PLUG BODY:

BRASS, NICKEL PLATED.

3. RATING:

IEC 61010-031 @ 1,000 V CAT IV P2.

CURRENT: 12 A MAX.


INTERNAL RESISTANCE: 55 m Ω MAX @ 200 cm LENGTH.

TEMPERATURE: -25° C TO $+80^{\circ}$ C.

CE DECLARATION OF CONFORMITY, LVD CONFORMS TO RoHS DIRECTIVE 2002/95/EC.





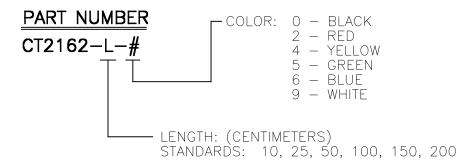

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	CONTRACT NO.			al Ta	ot Clo	otro o i		22820 Savi Ranch Parkway	V	
					Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610							
			APPROVALS	DATE	TITLE							
			DRAWN WDH	7/12/99		LEA	PLUGS,					
		MATERIAL	CHECKED			0.75mm2, SILICONE						
		FINISH	ENGR.		SIZE			DWG. NO.	D.C	17600	REV.	
NEXT ASSY	USED ON		DESIGN ACTIVITY		$\lfloor A \rfloor$	43F45		P217600 A			А	
APPLICATION			1		SCALE	NONE				SHEET 1 OF	2	

